
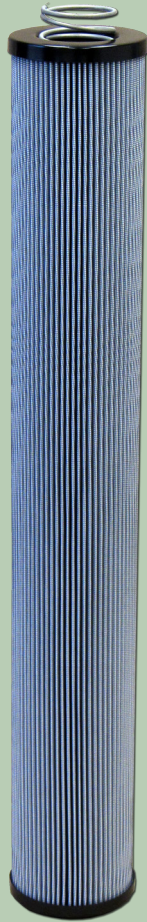


HYL Series

Hydraulic & Lubrication Filter

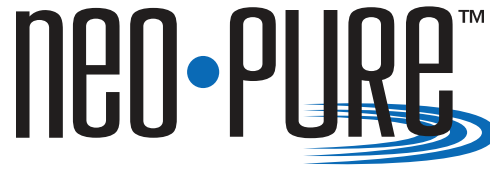

Commercial/Industrial Filtration Applications

Standard Features

- Manufactured in the USA
- ISO 16889 and Dynamic Filter Efficiency Testing
- Media provides high flow rates, low pressure drop and stable & dependable Beta x[c] rated efficiencies
- Multi-layer Dual Phase Microglass pleated media
- Neo-Pure Hydraulic Series Filters have screened, synthetic media designed for high flow rates
- Rigid-pleat structure that is supported by an epoxy coated carbon steel mesh
- Viton O-ring seal with external hold-down spring

Product Specifications

Micron Rating (Absolute)

Beta 12[c] \geq 1000

Cartridge Lengths

26" (66.04 cm)

Inside and Outside Diameters

2.17" (5.51 cm) ID, 3.78" (9.60 cm) OD

Cartridge Style

Single Open Ended (SOE) with Spring

Flow Direction

Out to In

Maximum Operating Temperature

250°F (121°C) temperature Limit

Recommended Change-Out Differential Pressure

25 psid (1.72 bar)

Maximum Pressure

150 psid (10.34 bar)

Materials of Construction

Filter Media: Microglass Supported both Sides

Inner Core: Electro-Tin Plated CS

End Cap: Corrosion Resistant CS/AL


Applications

- Petroleum & Synthetic based Hydraulic Fluids
- Turbine & Compressor lube oil
- Bearing & Gear oil



USA MADE

Dimensions (Part Number: HYL426-12VS)

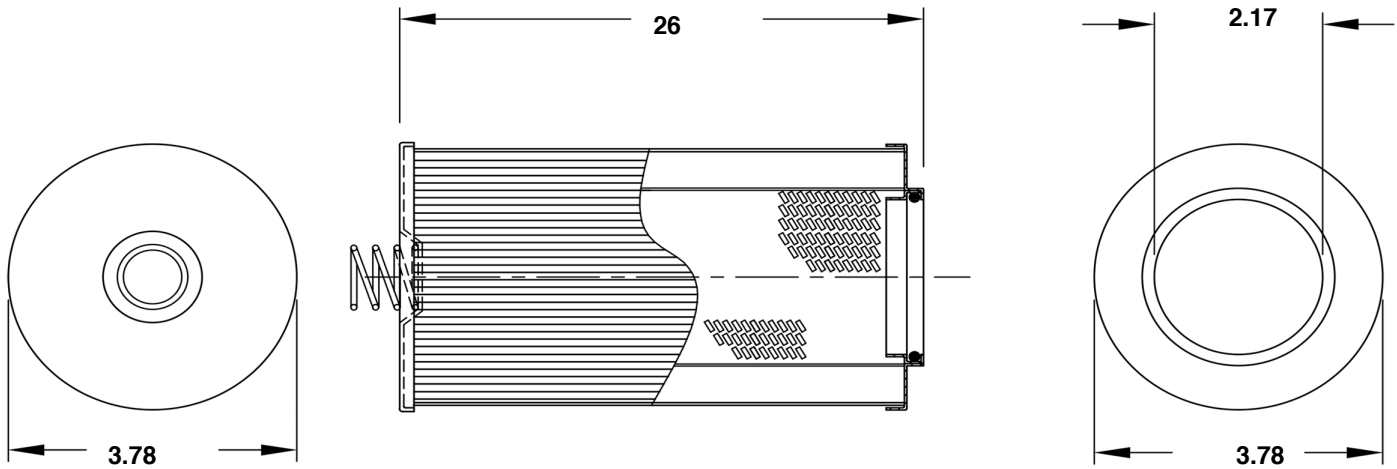

Compatible Filter

- Pall
- Parker
- Hypro
- Donaldson
- Hilco
- Schroeder
- Hycon
- PTI
- Purolator

Packaging

1 per carton, 6 lbs. RSC



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008
Tel 855.896.3525 · Fax 866.409.9622
www.neologicsolutions.com · info@neologicsolutions.com
STUART, FL · BEAVERTON, OR · GREENVILLE, SC · SAN DIEGO, CA

QUESTIONS?

Ask one of our Service Representatives:
Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six
days a week!

