


# K-NPQ1

## Quick Change Water Cooler Filter Kit

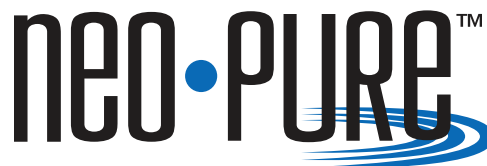

### *Residential/Commercial Filtration Applications*

## Standard Features

- Manufactured in the USA
- NP-QCB01PB 1 micron filter for sediment, chlorine taste and odor, cysts, and lead
- Designed for water coolers using cold and/or room temperature water
- NP-QCB01PB cartridge is tested and certified to NSF Standard 42 and 53
- Kit includes: single filter mounting bracket with mounting screws, inline valve assembly with built-in quick-connect fittings, NP-QCB01PB filter, 25 feet of 1/4" tubing, tubing clamps to secure water line to the wall. DOES NOT include a feed supply adapter.

To add a scale inhibitor, order the Neo-Pure K-NPQ1-S

## Product Specifications

### Filter Media

Coconut shell carbon block

### Filter Capacity

1250 gallons for lead, 2500 gallons for chlorine reduction

### Micron Rating (Nominal)

1 micron

### Flow Rate

0.5 gpm

### Connection Type

1/4" quick connect

### Operating Temperature

35-100 °F

### Operating Pressure (Maximum)

125 psi

### Dimensions

13.5"H x 3.25"W x 3.5"D

### WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

## Applications:

- Drinking Water Systems



Tested and certified to NSF Standard 42 and 53. Only applies to NP-QCB01PB filter cartridge. Does not apply to K-NPQ1 system.



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008

Tel 855.896.3525 • Fax 866.409.9622

[www.neologicsolutions.com](http://www.neologicsolutions.com) • [info@neologicsolutions.com](mailto:info@neologicsolutions.com)

STUART, FL • BEAVERTON, OR • GREENVILLE, SC • SAN DIEGO, CA

### QUESTIONS?

Ask one of our Service Representatives:  
Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six  
days a week!





## 2802110-00 Carbon Block Prefilter Specifications



### Contaminants Reduced

Chlorine, sediment/dirt/rust, lead, cyst

### Filter Media

Coconut shell carbon block

### Filter Capacity

500 gallons or 6 months

### Micron Rating (Nominal)

0.5 sub-micron

### Flow Rate

1.0 gpm

### Dimensions

10"H x 2-1/2" diameter

### Connection Type

1/4" quick connect

### Operating Temperature

100°F maximum

### Operating Pressure (Maximum)

30-100 psi



## 2802140-00 Hollow Fiber Membrane Specifications

### Contaminants Reduced

Bacteria, cyst, particulates, virus reduction

### Filter Media

Hollow fiber membrane, polyethersulfone (PES)

### Filter Capacity

1000 gallons or one year

### Micron Rating (Nominal)

0.025 sub-micron

### Flow Rate

1.0 gpm

### Dimensions

10"H x 3-3/8" diameter

### Connection Type

1/4" quick connect

### Operating Temperature

100°F maximum

### Operating Pressure (Maximum)

30-100 psi

Twice the flow rate

**2X**



## Benefits of the TL3 Ultrafiltration Membrane

- The Neo-Pure TL3 **0.025 sub-micron** membrane has **twice as much surface area** when compared to other undersink ultrafiltration drinking water systems
- This added surface area allows the TL3 system to operate at a **higher flow rate of 1.0 gpm**
- This **higher flow rate** means that you can use your new TL3 ultrafiltration system to supply water to multiple points of use simultaneously, such as a drinking water faucet, refrigerator ice maker, instant hot water system, etc.



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008

Tel 855.896.3525 • Fax 866.409.9622

[www.neologicsolutions.com](http://www.neologicsolutions.com) • [info@neologicsolutions.com](mailto:info@neologicsolutions.com)

STUART, FL • BEAVERTON, OR • GREENVILLE, SC • SAN DIEGO, CA

### QUESTIONS?

Ask one of our Service Representatives:  
Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six  
days a week!

