


NP-QSED5

Quick Change Sediment Water Filter

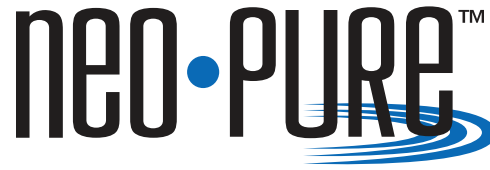

Contaminants Reduced:

- Dirt
- Rust
- Sediment



Residential/Commercial Filtration Applications

Standard Features

- Manufactured in the USA
- Use with the Neo-Pure K-NPQ2 or K-NPQ2-S Quick Change Water Cooler Kit, and compatible with the Sterilight/R-CAN Advanced Water Products RO-QC4P
- Spun bonded polypropylene filter media provides depth filtration
- Protects downline equipment
- Cartridge is sealed, preventing the potential for introducing bacteria through handling
- Reduction of sediment as small as 5 microns
- Quick change filter allows for easy replacement – filter detaches from permanent head with a twist of the wrist

Product Specifications

Filter Media

Spun bonded polypropylene

Micron Rating (Nominal)

5 microns

Dimensions

2-1/2" dia. x 10"

Capacity

1250 gallons

Operating Temperature

35-100 °F (2-38 °C)

Maximum Operating Pressure

125 psig (8.6 bar)

Maximum Flow Rate

0.5 gpm

Connection Type

1/4 turn quick connect

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008
Tel 855.896.3525 · Fax 866.409.9622
www.neologicsolutions.com · info@neologicsolutions.com
STUART, FL · BEAVERTON, OR · GREENVILLE, SC · SAN DIEGO, CA

QUESTIONS?

Ask one of our Service Representatives:
Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six
days a week!

