


SGD-45 Series

Graded Density Sediment Filters

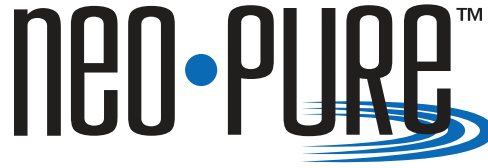

Contaminants Reduced:

- Dirt
- Rust
- Sediment

	<p>Tested and certified by NSF International against NSF/ANSI Standard 42 for material safety only</p>
--	--

*Residential/Commercial/Industrial/
Municipal Filtration Applications*

Standard Features

- Manufactured in China
- Works as a prefilter and postfilter all in one, eliminating the need for step-down filtration systems in your home
- Outer layer is a 50 micron prefilter that takes out larger sediment, reducing the load on the 5 micron inner-layer postfilter
- Graded density allows the filter to operate more efficiently and consistently
- Will not add taste, odor, or color to the liquid being filtered
- Three times the dirt-holding capacity of similar-sized sediment water filter cartridges
- Designed for purity, bacteria resistance, and chemical resistance

Product Specifications

Filter Media

Spun Bonded Polypropylene

Micron Rating (Nominal)

50 to 5 microns

Dimensions

4-1/2" dia. x 9-3/4", 4-1/2" dia. x 20"

Cartridge Style

Drop-In

Operating Temperature

40 to 145° F (4.4 to 62.7 °C)

Maximum Flow Rate

10 gpm


Case Pack

6 (20), 12 (9-3/4) per case

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Graded Density



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008
 Tel 855.896.3525 · Fax 866.409.9622
www.neologicsolutions.com · info@neologicsolutions.com
 STUART, FL · BEAVERTON, OR · GREENVILLE, SC · SAN DIEGO, CA

QUESTIONS?

Ask one of our Service Representatives:
 Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six days a week!

