


Components Selection Guide



CLICK ON LINKS

Replacement Manifold for TL3 Ultrafiltration System

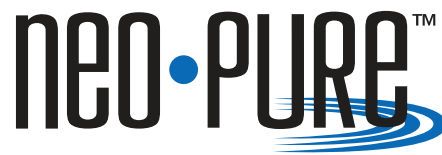

Manifold

- Inlet/Outlet: 1/4" quick connect
- Flow Rate: 1 gpm
- Replace broken or damaged manifold without having to replace whole system

Stainless Steel Flow Restrictors FRSS



Flow Restrictors

- O-ring: EPDM
- 1/2" FPT ports
- Made of 316L stainless steel
- Available flow rates: 2.5 to 6 gpm

Carbon Block Filter 2802110-00 for TL3 Ultrafiltration System

- Eco-friendly coconut shell carbon block filter media
- Micron Rating: 0.5 micron
- Filter Capacity: 500 gallons or 6 months
- Tested and certified by WQA to NSF/ANSI Standard 53 and Standard 42
- Flow Rate: 1.0 gpm

Filter



Hollow Fiber Membrane 2802140-00 for TL3 Ultrafiltration System

- Micron Rating: 0.025 micron
- Filter Capacity: 1000 gallons or 12 months
- Tested and certified by WQA to NSF/ANSI Standard 53 and Standard 42
- Flow Rate: 1.0 gpm

Membrane



Flow Control Kit for Seagull® IV X-1 Systems



Flow Control Kit

- 1 GPM 3/8" x 3/8"
- Kit includes: flow restrictor, 4 ft. blue 3/8" OD tubing, two 3/8" brass compression nuts, two 3/8" plastic ferrules, two 3/8" tube inserts
- Ensures water does not exceed 1.0 gallons per minute

Inline Flow Restrictors



Inline Restrictors

- Compatible with many drinking water systems
- 1 GPM 1/4" QC
- Excellent addition for point-of-use (POU) UV disinfection systems
- Ensures water does not exceed 1.0 gallons per minute

Neoprene Sun Shields

- Compatible with Rusco Spin Downs and Sediment Trappers
- Fits fully over the filter cover
- Shields from the sun and helps inhibit algae and bacteria growth
- Filter body, cover, flush valve, and screen are not included

Sun Shields



NP-SS10 NP-SS11 NP-SS15 NP-SS20

DISTRIBUTED BY: