

SGD-45-2005

Graded Density Sediment Filters



Contaminants Reduced:

- Sediment, Dirt and Rust

*Residential / Commercial / Industrial /
Municipal Filtration Applications*

Standard Features

- Manufactured in China
- Works as a prefilter and postfilter all in one, eliminating the need for step-down filtration systems in your home
- Outer layer is a 50 micron prefilter that takes out larger sediment, reducing the load on the 5 micron inner-layer postfilter
- Graded density allows the filter to operate more efficiently and consistently
- Will not add taste, odor, or color to the liquid being filtered
- Three times the dirt-holding capacity of similar-sized sediment water filter cartridges
- Designed for purity, bacteria resistance, and chemical resistance

Specifications

Filter Media

Spun Bonded Polypropylene

Micron Rating (Nominal)

50 to 5 microns

Size

4-1/2" dia. x 20"

Cartridge Style

Drop-In

Operating

Temperature

40 to 145°F (4.4 to 62.7 °C)

Maximum Flow

10 gpm


Case Pack

6 per case

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Graded Density

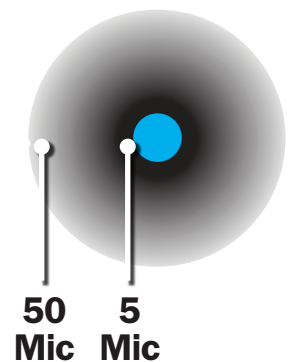

DISTRIBUTED BY: