
## **CTOX Series** Choramine Plus Carbon Block Filter Cartridges



### **Contaminants Reduced:**

0

- Asbestos reduction\*
- Atrazine reduction\*Chlorine Taste
- and Odor\*
- Cyst reduction\*
  Lead reduction\*
- Lead reduction\*

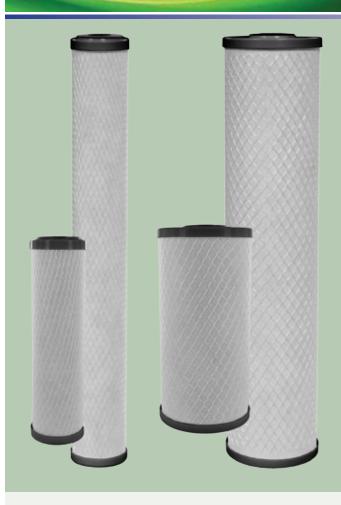

### Lindane reduction\*

- Mercury reduction\*
- MTBE reduction\*
  Particulate I
  - Particulate I reduction\*
- VOC reduction\*

# Residential/Commercial Filtration Applications

neo•pure

### **Standard Features**

- Manufactured in the the USA
- Eco-friendly activated coconut shell carbon filter media to provide exceptional filtration and a high level of CTO, Lead, Chloramine, MTBE, VOC, and Cyst reduction
- Economical and competitive price while providing exceptional performance and high adsorptive capacity
- All materials and components are FDA compliant. Ideal for drinking water applications in residential, food service and commercial settings
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- Polypropylene outer netting and layers provide superior sediment and particulate reduction

### **Product Specifications**

#### **Filter Media**

Coconut shell carbon block

Micron Rating (Nominal) 0.5 micron

#### **Cartridge Length**

2-1/2" x 9-7/8", 2-1/2" x 20", 4-1/2" x 9-7/8", and 4-1/2" x 20"

Outside Diameters 2-1/2" and 4-1/2" OD

Operating Temperature

35°F - 100°F (2°C - 38°C)

#### WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.


\*Based on Manufacturer's testing



### Ordering Guide (Example: CTOX-4510)

PART NUMBER	NOMINAL DIMENSIONS	CHLORINE CAPACITY (GALLONS)	CHLORAMINE, LEAD & MERCURY, VOC & MTBE	MAXIMUM FLOW	NOMINAL MICRON RATING	INITIAL PRESSURE DROP (PSI)
CT0X-2510	2-1/2" x 9-7/8"	10,000	1,000 @ 0.75GPM	1 GPM (3.785 LPM)	0.5	< 8 PSI @ 1 GPM
CT0X-2520	2-1/2" x 20"	20,000	2,000 @ 1.5GPM	2 GPM (7.57 LPM)	0.5	< 8 PSI @ 2 GPM
CTOX-4510	4-1/2" x 9-7/8"	20,000	2,000 @ 2.25GPM	3 GPM (11.35 LPM)	0.5	< 7 PSI @ 3 GPM
CTOX-4520	4-1/2" x 20"	42,000	4,000 @ 3GPM	6 GPM (22.71 LPM)	0.5	< 8 PSI @ 6 GPM

### **Dimensions**

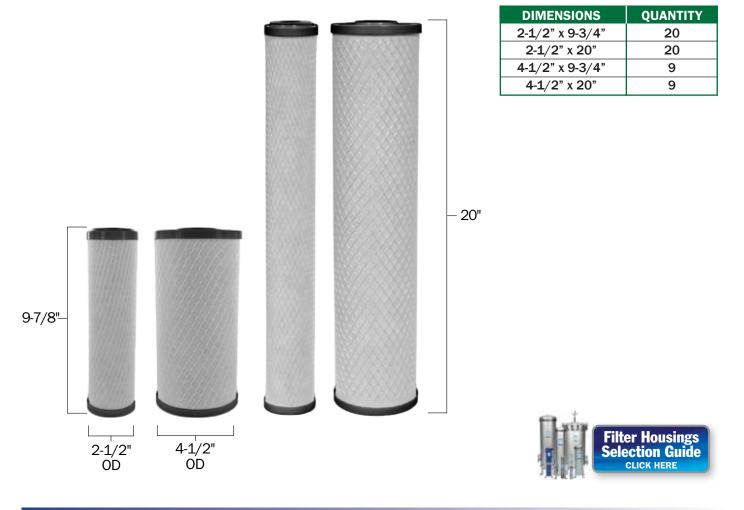

Distributed By:



2299 Ridge Rd., Greenville, SC P:888.859.1188 • F:864.284.1819 NeoLogicSolutions.com • Info@NeoLogicSolutions.com

### **Questions?**

**Case Packs** 

Ask our Service Representatives at: 888.859.1188 Mon.-Fri. 8a-8p, Sat 8:30a-4:30p EST.

All rights and illustrations reserved. Manufacturer reserves the right to make changes without notice. ©2017 NeoLogic Solutions.