


SDG-25 Series Sediment Grooved Cartridges

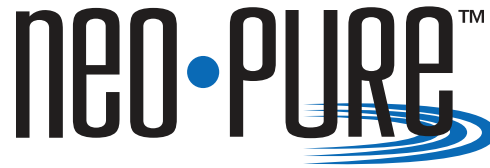

Residential/Commercial Filtration Applications

Standard Features

- Manufactured in China
- Dependable and cost-effective solution for pre-filtration for the food and beverage industry
- Grooves create increased surface area for longer cartridge life and high dirt-holding capacity
- Melt blown polypropylene filter media
- Provides excellent prefiltration in reverse osmosis systems, UV systems, and beverage filtration systems
- Filters for particulates, sediment, dirt, and rust

Product Specifications

Filter Media

Polypropylene

Micron Rating (Nominal)

5 microns

Dimensions

2-1/2" diameter x 9-7/8", 2-1/2" diameter x 20"

Cartridge Style

Drop-In

Operating Temperature

40°F to 145°F (4.4°C to 62.8°C)

Maximum Pressure Drop

69°F (20°C) 46.4 psi (3.2 kg/cm²)

Recommended Replaceable Pressure Drop

21.75 psi (3.2 kg/cm²)

Maximum Flow

7 gpm/14 gpm

Case Pack

25 per case (9-3/4"), 25 per case (20")

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Applications

- Beverages
- Electronics
- Fine Chemicals
- Plating Solutions
- Potable Water
- Prefiltration for Reverse Osmosis



9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008

Tel 855.896.3525 · Fax 866.409.9622

www.neologicsolutions.com · info@neologicsolutions.com

STUART, FL · BEAVERTON, OR · GREENVILLE, SC · SAN DIEGO, CA

QUESTIONS?

Ask one of our Service Representatives:
Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

We ship six
days a week!

